

Digital display - MCR-SL-D-FIT - 2864024


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



MCR digital display, for measuring and displaying frequencies, pulses and times, 6-fig. display



Key commercial data

Packing unit	1
Minimum order quantity	1
Catalog page	Page 385 (IF-2009)
GTIN	 4 017918 976477
Weight per Piece (excluding packing)	92.6 GRM
Country of origin	GERMANY

Technical data

Input data

Input resistance of voltage input	10 kΩ
-----------------------------------	-------

Switching output

Output name	1 NPN optocoupler
Maximum switching voltage	30 V DC

Power supply

Supply voltage range	10 V DC ... 30 V DC
Max. current consumption	max. 40 mA

General data

Width	48 mm
Height	24 mm
Depth	68 mm
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Degree of protection	IP65 from the front
Color	black
Housing material	Macrolon 2405

Digital display - MCR-SL-D-FIT - 2864024

Technical data

General data

Conformance	CE-compliant
UL, USA / Canada	UL 508 Recognized

Classifications

eclass

eCl@ss 4.0	27210120
eCl@ss 4.1	27210120
eCl@ss 5.0	27210120
eCl@ss 5.1	27210120
eCl@ss 6.0	27210120

etim

ETIM 2.0	EC001485
ETIM 3.0	EC001485
ETIM 4.0	EC001485

unspsc

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

Approvals

Certificates

Certification

UL Recognized / cUL Recognized / cULus Recognized

Certification EX

Certification submitted

Approval details

UL Recognized

cUL Recognized


Digital display - MCR-SL-D-FIT - 2864024

Approvals


cULus Recognized

Drawings

Dimensioned drawing

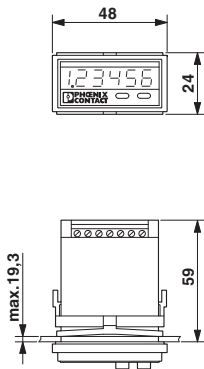

Circuit diagram

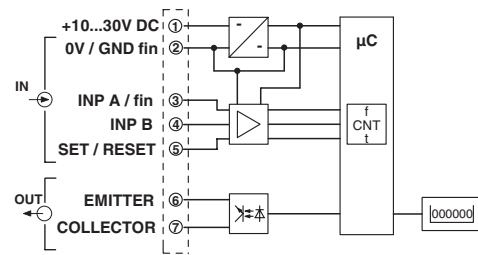

Dimensioned drawing

